


Nophadrain Water Retention Systems for extensive green roofs



With extra water buffer

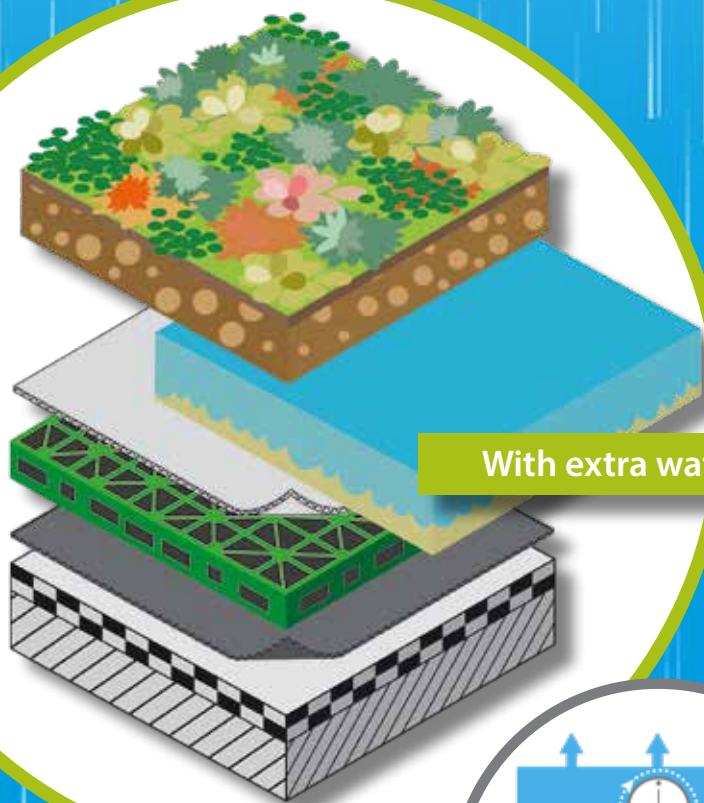

Water retention systems for sustainable and climate-proof cities

Why use water retention systems?

The consequences of the climate change are and will be the challenge for our and our next generation. On the one hand we face temperature increase. On the other hand, we have to cope with heavy and unforeseen rainfalls, causing flooding and severe overloads of the storm water systems in cities. This combined with the trend towards urbanization and the increasing wish towards "green, more biodiverse living space" to fulfill our basic needs, challenges our society.

The reclaiming of land and subsequent sealing of natural soil by urbanization, is seen as one key drivers for the flooding issues. Since rainwater cannot percolate anymore into the ground, water runs off straight into the storm water system, causing overload of the storm water system, potentially combined with flooding. The small water cycle is more and more disturbed as there is no time for water to evaporate.

Basic green roofs already help to overcome this challenging situation by delaying the flow of the precipitation into the storm water system and enhancing transpiration and evaporation by its vegetation. When equipping a basic green roof with defined water storage elements in combination with an adjustable flow control system the basic green roof transforms into a water retention and water management system. Based on rainfall runoff models, such systems can be designed to store calculated water volumes over a specific period (e.g. 24 hours) and to relieve calculated water volumes into the storm water system.

Nophadrain has developed a specific system for extensive greens roofs based on the ND WSE-100lte Water Retention Element. The water storage capacity of this system is approx. 95 l/m². Combined with the adjustable ND AFC-200 Adjustable Flow Control (adjustable to reduce the water flow down to 0.04 l/s), this system


builds the best base for any water retention system for extensive green roofs.

Combine water retention and water buffering in one

To distress the storm water system, typical water retention systems are designed to store a defined capacity of water (l/m²) combined with a calculated water flow rate to relieve the entire and temporarily stored water over a certain period (e.g. 24 hours) underneath the vegetation and substrate. By this, the water is not available for the vegetation. Therefore, Nophadrain recommends combining the water retention systems for extensive green roofs with special ND SM-25 / ND SM-50 Substrate Panels or ND WSM-50 Water Reservoir Panels. These panels allow an additional water storage of 15, 30 or 40 l/m² and are installed on top of the water retention element. They buffer water up to the saturation point. The water is made available for the vegetation and by this


This is how the system works*

1.




When entirely empty and dry, the total water retention and buffer volume (excluding substrate and vegetation) amounts 135 l/m². The ND AFC-200 Adjustable Flow Control is set manually to the right runoff coefficient.

2.



Rain shower occurs and flows through the substrate and is buffered into the ND WSM-50 Water Reservoir Panel until saturation.

3.

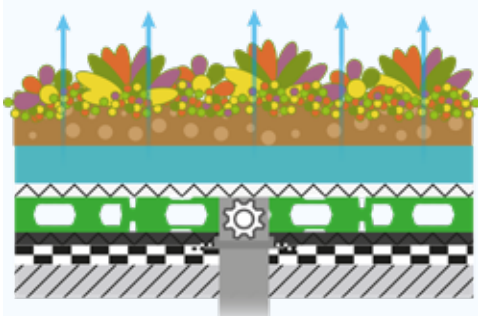


When fully saturated, the ND WSM-50 Water Reservoir Panel buffers 40 l/m² water.

*This example shows the option with the ND WSE-100lte Water Retention Element and the ND WSM-50 Water Reservoir Panel.

Typical build-up: Nophadrain Water Retention System for extensive green roofs

the important evapotranspiration is being fostered. Only excess water will flow into the retention layer.

Furthermore, the ND SM-25 / ND SM-50 Substrate Panels and the WSM-50 Water Reservoir Panels can reduce the weight of the build-up since the water buffering panels can function as a substrate substitute. By adding the extra water buffer, not only the water management on the roof gets improved to the next level – the water reservoir panels also function as an additional 'filter layer'. This allows the use of substrates with higher organic content, enabling an even more biodiverse vegetation with increased transpiration and evaporation.

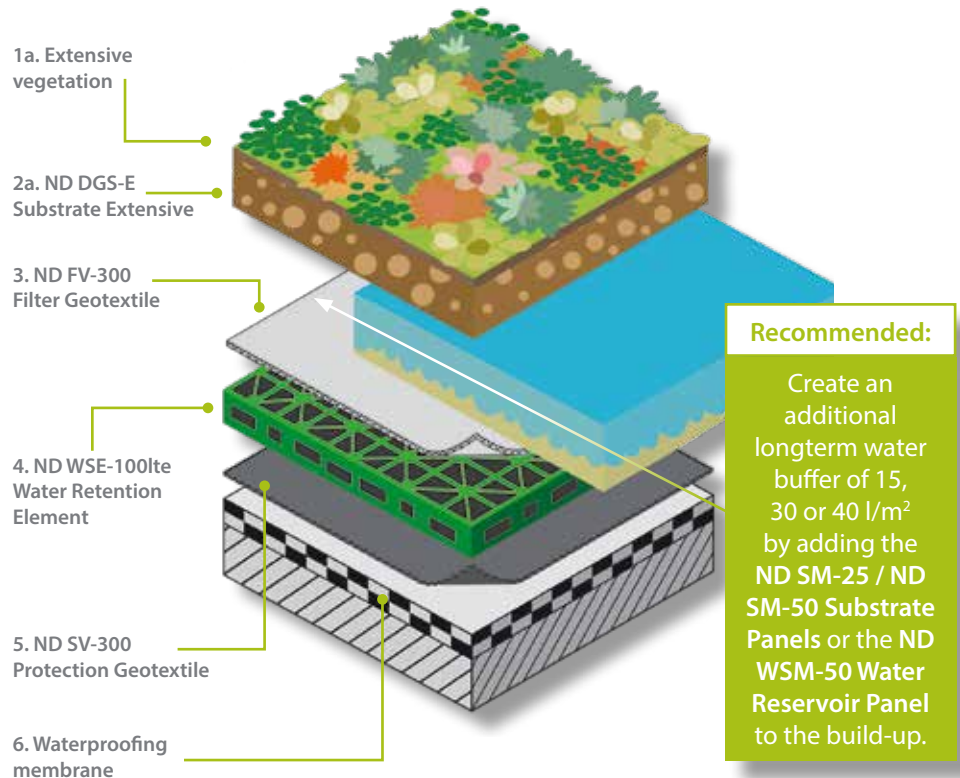

4

Only when exceeding the storage capacity of the ND WSM-50, due to ongoing rainfalls, the water flows into the ND WSE-100lte Water Retention Element with a retention volume of 95 l/m². The water is stored here temporarily for a period that is set by the calculated flow rate of the ND AFC-200 Adjustable Flow Control.




5

After the rain has stopped the water retained in the ND WSE-100lte Water Retention Element, continues to flow at the set flow rate into the storm water system.

40 l/m² are still safely buffered in the ND WSM-50 Water Reservoir Panel and available for the vegetation.

6

Depending on the intensity and frequency of rainfalls, the main amount of the water will be retained in the vegetation layer and ND WSM-50 Water Reservoir Panel. Only during extreme rainfall, the ND WSE-100lte Water Retention Element will have a retention function. Generally, the water fully contributes to the evaporation and transpiration, enhancing the small water cycles by returning the water to its surroundings.

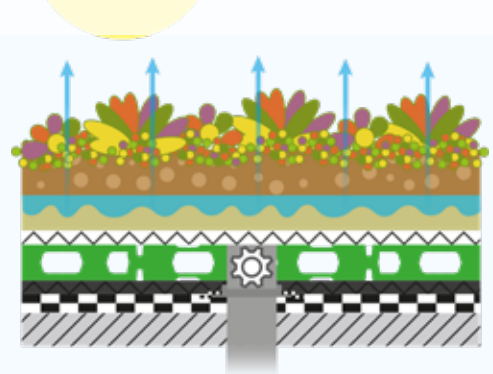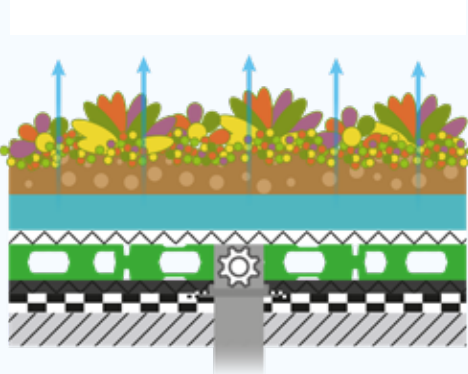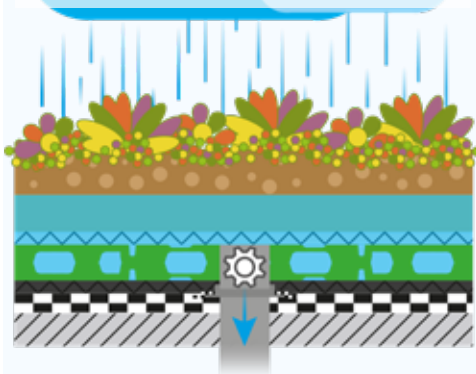

Benefits of the system

Calculated runoff through adjustable flow control system

Every water retention system is to be combined with an adjustable flow control system (ND AFC-200 Adjustable Flow Control). The project specific flow rate is adjusted to the calculated runoff values by turning and fixing the adjustable flow control to the required position in line with the flow control table.



Relieving the storm water system

The ND WSE-100lte can store water up to 95 l/m². By adding the ND SM-25 / ND SM-50 Substrate Panels or ND WSM-50 Water Reservoir Panels, an additional 15, 30 or 40 l/m² water can be buffered on the roof.

Healthier vegetation and reduction of the urban heath island effect

By adding an extra, long-term water buffer, the vegetation has a water supply during dry periods. More and healthier green (wildflowers, herbs and grasses) means more evaporation and transpiration, which helps to reduce the temperatures in urban areas. This contributes to a healthier and more livable city climate.

Weight reduction

The ND SM-25 / ND SM-50 Substrate Panels and ND WSM-50 Water Reservoir Panels can reduce the weight of the build-up since the water buffering panels can function as a substrate substitute. Contact us for more detailed information regarding weight reduction.

Technical properties			
Product name	Height	Compressive strength	Water retention capacity
ND WSE-100lte	approx. 100 mm	> 240 kN/m ²	approx. 95 l/m ²
ND SM-25 / ND SM-50	approx. 25 / 50 mm	-	approx. 15 / 30 l/m ²
ND WSM-50	approx. 50 mm	-	approx. 40 l/m ²



+ extra filter

The ND WSM-50 Water Reservoir Panels function as an additional 'filter layer'. This allows the use of substrates with higher organic content, enabling an even more biodiverse vegetation with increased transpiration and evaporation.

nophadrain®
SMART GREEN ROOF SYSTEMS

Nophadrain BV

Visiting address
Mercuriusstraat 10
6468 ER Kerkrade
Netherlands

Postal address
Postbus 3016
6460 HA Kerkrade
Netherlands

 +31 (0)45 535 50 30

 info@nophadrain.com

 www.nophadrain.com